

# DYDEN CORPORATION

ELECTRIC WIRES  
& CABLES PRODUCTS

DATE Jan, 7, 2011

SPEC. No.FSC11-011

## SPECIFICATION

FOR

ETHYLENE TETRAFLUOROETHYLENE (ETFE) INSULATED  
AND PVC JACKETED CABLE WITH SHIELD

(RMFES - SB - Kr (2586))

RoHS correspondence

signed by *K. Nishimura*  
K. NISHIMURA

Manager  
Engineering section  
Engineering dept  
Factory Automation & Robot Cable Division

1. SCOPE

This specification covers the construction, characteristics of the Ethylene Tetrafluoroethylene (ETFE) insulated and PVC jacketed cable with shield .

2. SYMBOL, SIZE

The symbol and size of the cable shall be

“ RMFES-SB-Kr(2586) AWG21/20P ”  
(0.5mm<sup>2</sup>/20P)

3. UL STANSARD

RECONGNIZED by UNDERWIRITERS LABORATORIES Inc.

STYLE No.	2586 (UL 758 : AWM)
Rating TEMP.	105°C
VOLT.	600V
USE	External interconnection or internal wiring of electronic equipment.

4. FLAME TESTING

The cable shall pass the vertical wire flame test (VW-1) described in UL1581, Paragraph 1080.

5. CONSTRUCTION


The construction of the cable shall conform to Table 1.

6. CHARACTERISTICS

The characteristics of the cable shall be shown in Table 2.

7. MARKING

The following information shall be indicated with a suitable method to the cable.

“ —DYDEN E91337  AWM 2586 105C 600V VW-1 -LF- RMFES-SB — ”

\* \* \* \* \*

Table 1 Construction


I T E M		V A L U E
Symbol		RMFES-SB-Kr(2586)
Size	AWG (mm <sup>2</sup> )	21 (0.5)
Conductor	Material	Tinned Annealed Copper
	Construction (No./mm)	3/33/0.08
	Dia. (approx. mm)	1.14
Insulation	Material	ETFE
	Thickness (approx. mm)	0.40
	Dia. (approx. mm)	1.94
Twisting	Dia. (approx. mm)	3.9
Stranding	Center layer	7 P
	First layer	13 P
Tape	—	Binder tape
Shield (Braid)	Material	Tinned Annealed Copper
	Thickness (approx. mm)	0.5
Jacket	Material (color)	Flame retardant • Smooth PVC (Black)
	Thickness (approx. mm)	1.7
Overall diameter (approx. mm)		23.1
Approx. mass (kg/km)		630

Table 2 Characteristics (at 20°C)

I T E M	S T A N D A R D V A L U E
Max. DC resistance of conductor (Ω/km)	43.4
Min. insulation resistance (MΩ-km)	100
Dielectric strength (V/min)	AC 2000

# Fig 1

## Cross-Section of Cable

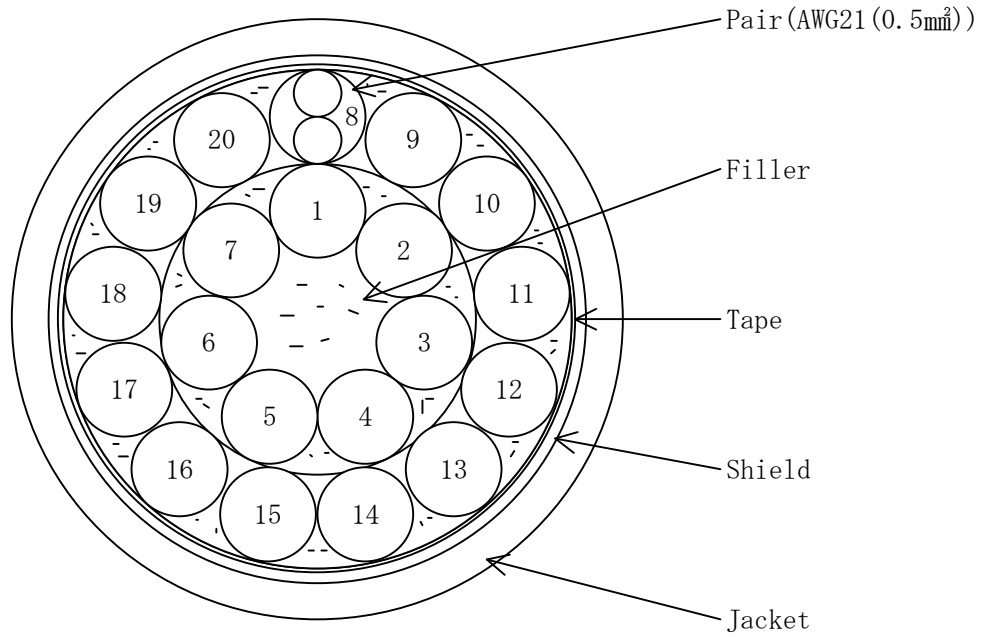

PairNo.	Colors	PairNo.	Colors
1	Blue×White	11	Blue×Black
2	Yellow×White	12	Yellow×Black
3	Green×White	13	Green×Black
4	Red×White	14	Red×Black
5	Purple×White	15	Purple×Black
6	Blue×Brown	16	Blue×Gray
7	Yellow×Brown	17	Yellow×Gray
8	Green×Brown	18	Green×Gray
9	Red×Brown	19	Red×Gray
10	Purple×Brown	20	Purple×Gray

NOT TO SCALE