

# DYDEN CORPORATION

ELECTRIC WIRES  
& CABLES PRODUCTS

DATE. Dec. 17, 2007

SPEC. No. JS07-1015

## SPECIFICATION

FOR

ETHYLENE TETRAFLUOROETHYLENE (ETFE) INSULATED  
AND PVC JACKETED CABLE WITH SHIELD  
(RMFES - SB - Kr(2517))

signed by

\_\_\_\_\_   
Y. KAWANAMI

Manager

Technical section

Communication cable dept

1. SCOPE

This specification covers the construction, characteristics of the Ethylene Tetrafluoroethylene (ETFE) insulated and PVC jacketed cable with shield.

2. SYMBOL, SIZE

The symbol and size of the cable shall be  
” RMFES-SB-Kr(2517) AWG25/5P ”  
(0.2mm<sup>2</sup>/5P)

3. UL STANDARD

RECOGNIZED by UNDERWRITERS LABORATORIES Inc.

STYLE No.	2517 (UL 758 : AWM)
Rating TEMP.	105°C
VOLT.	300V
USE	External interconnection of electronic equipment or internal wiring of electronic equipment or appliances.

4. FLAME TESTING

The cable shall pass the vertical wire flame test (VW-1) described in UL1581, Paragraph 1080.

5. CONSTRUCTION


The construction of the cable shall conform to Table 1.

6. CHARACTERISTICS

The characteristics of the cable shall be shown in Table 2.

7. MARKING

The following information shall be indicated with a suitable method to the cable.

“ —DYDEN E91337  AWM 2517 105C 300V VW-1 -LF- RMFES-SB — ”

\* \* \* \* \*

Table 1 Construction

I T E M		VALUE
Symbol		RMFES-SB-Kr(2517)
Size	AWG(mm <sup>2</sup> )/Pairs	25(0.2)/5P
Conductor	Material	Tinned Annealed Copper
	Construction (No. /mm)	40/0.08
	Dia. (approx. mm)	0.58
Insulation	Material	ETFE
	Thickness (approx. mm)	0.20
	Dia. (approx. mm)	0.98
Twisting	Dia. (approx. mm)	2.0
Stranding	Center layer	5 P
Tape	Material	Paper
Shield (Braid)	Material	Tinned Annealed Copper
	Thickness (approx. mm)	0.3
Jacket	Material (color)	Flame retardant • Smooth PVC (Black)
	Thickness (approx. mm)	1.0
Overall diameter (approx. mm)		7.5
Approx. mass (kg/km)		75

Table 2 Characteristics (at 20°C)


I T E M	STANDARD VALUE
Max. DC resistance of conductor ( $\Omega$ /km)	107.3
Min. insulation resistance ( $M\Omega$ -km)	100
Dielectric strength (V/min)	AC 2000

# F i g 1

## C r o s s - S e c t i o n o f C a b l e

[ Symbol : RMFES-SB-Kr(2517) ]

[ Size : AWG25 (0.3mm<sup>2</sup>) / 5P ]

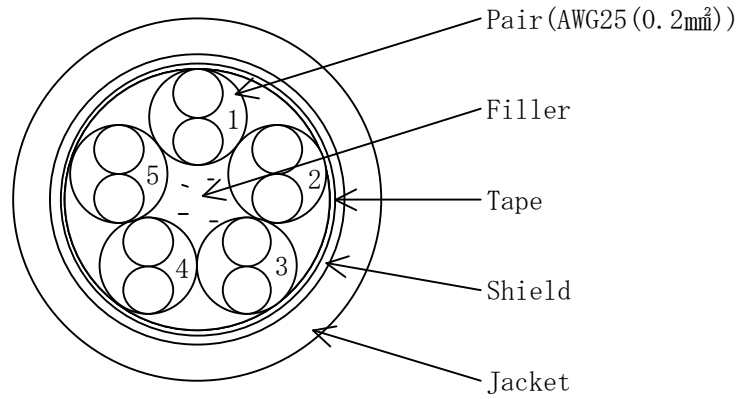

PairNo.	Colors
1	Yellow×White
2	Red×Blue
3	Green×Orange
4	Gray×Black
5	Light blue×Brown

NOT TO SCALE